


PROJECTORS LUMINAIRE

HELIOS

F75-480260

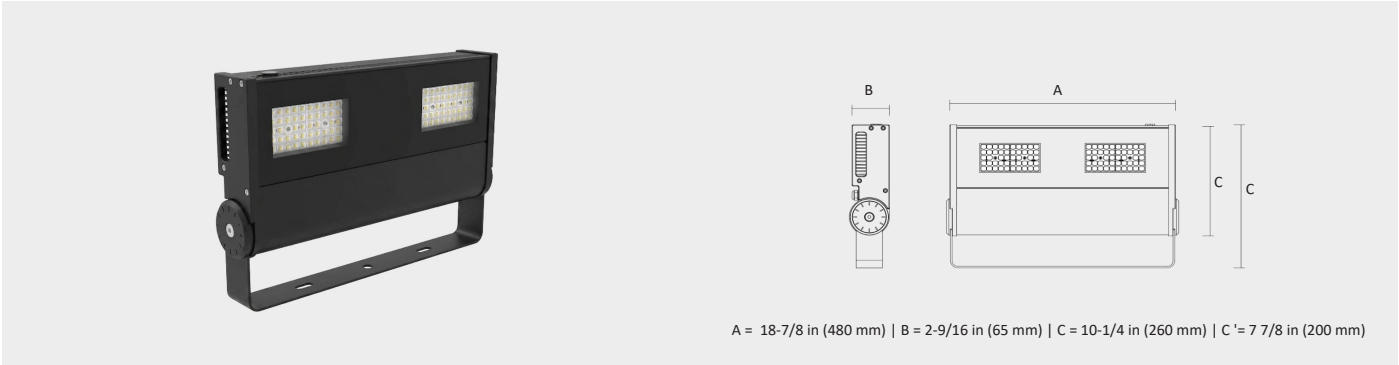


PRODUCT FEATURES



DESCRIPTION

The light engineered to accentuate structures with precision and elegance. Designed for high performance illumination, it features robust die-cast aluminum construction with a marine grade powder coated finish. Equipped with advanced optics, it delivers focused, uniform light distribution to enhance structural contours while minimizing glare. Ideal for heritage structures, and landmark architecture, ensuring long lasting durability and visual impact in outdoor environments.

LIGHT DISTRIBUTION



FINISHES



ACCESSORIES

- Optical Accessories
- Frosted

PRODUCT PARAMETER

Power	Input Voltage	Beam Angle	CRI	CCT	Control Type	Finishes	IP Rating
165W	AC 120V-277V 50-60 Hz	60°	90-Ra>90	2700K	On/Off	Black	IP-66
		90°		3000K	Phase Dimming	Gray Silver	
		120°		4000K	0-10V Dimming	Basalt Gray	
				6000K			

**Please provide the specific details based on the requirements for the products you are ordering.