


PROJECTORS LUMINAIRE

HELIOS

F53-216120

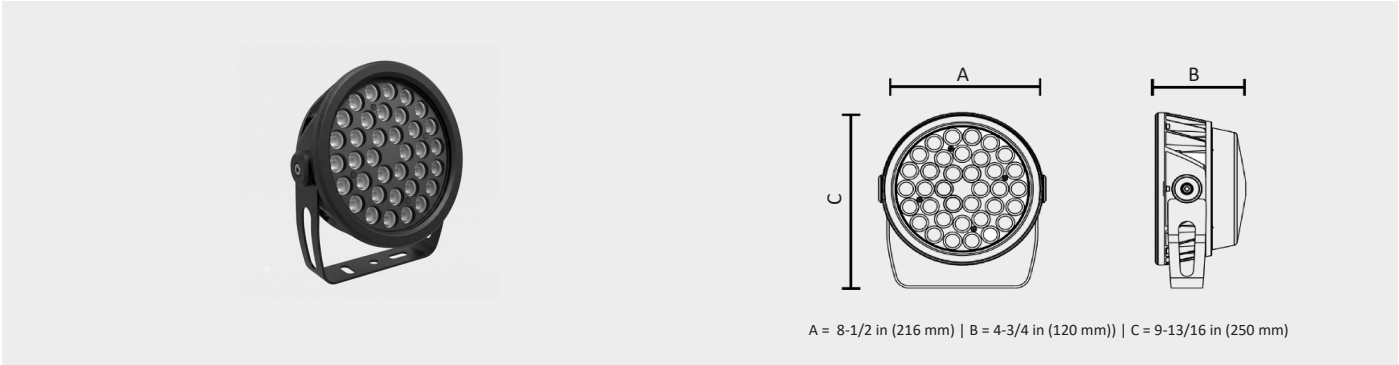


PRODUCT FEATURES



DESCRIPTION

The floodlight luminaire is constructed from high quality die-cast aluminum, ensuring durability and efficient heat dissipation for long-term performance. Designed as a high-performance projector light, it provides powerful illumination for outdoor and architectural applications. The luminaire features advanced optics delivering uniform light distribution with multiple beam angle options. Its adjustable mounting design allows precise aiming and flexible installation on-site. Engineered with high-efficiency optical technology, it ensures consistent output with minimized glare across various applications.

LIGHT DISTRIBUTION

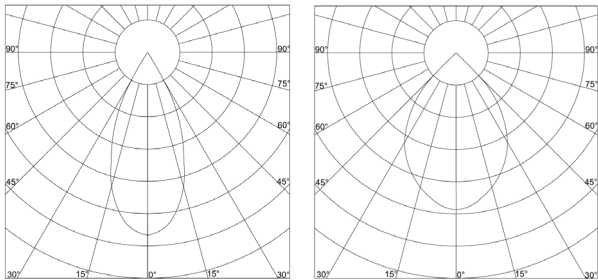

FINISHES



PRODUCT PARAMETER

Power	Input Voltage	Beam Angle	CRI	CCT	Control Type	Finishes	IP Rating
65W	AC 120V-277V 50-60 Hz	15°	90-Ra>90	2700K	On/Off	Black	IP-66
		30°		3000K	Phase Dimming	Gray Silver	
		60°		4000K	0-10V Dimming	Basalt Gray	
		90°		6000K	DALI Dimming		

**Please provide the specific details based on the requirements for the products you are ordering.